




# Cotton Shredder





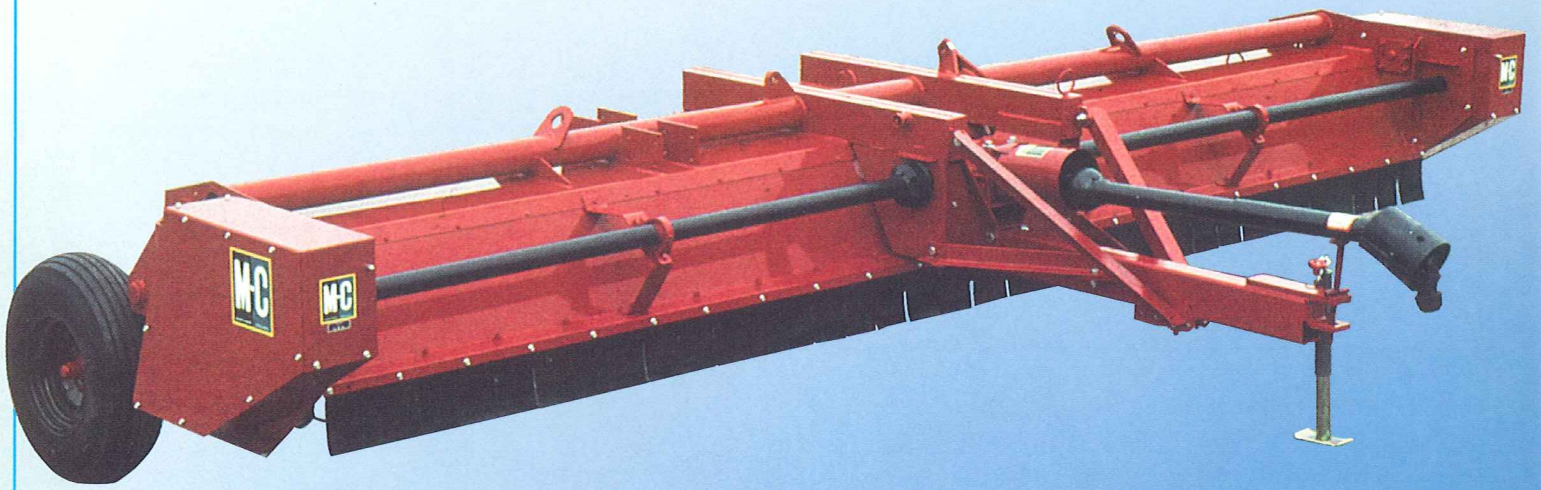

# Cotton Shredder


Built tough and packed with standard heavy duty features

- 2000 RPM Rotor Speed
- 2-3/16" Sealed Rotor Bearings
- Heavy Duty Box-Type Housing and Body
- Adjustable Front Cutter Bar
- Bolt-In Replaceable Front Cover
- Replaceable Hood Liner
- Full One Year Warranty



Four adjustable axles with 15" rims and 9.5L tires.



Side-slice, reversible J knives are heat-treated and durafaced for longer lasting performance.

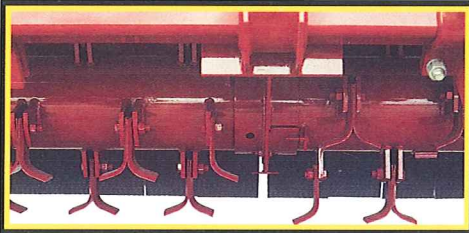

Drives at each end of the machine feature twin 3 groove power band belts and heavy duty flat back idler.

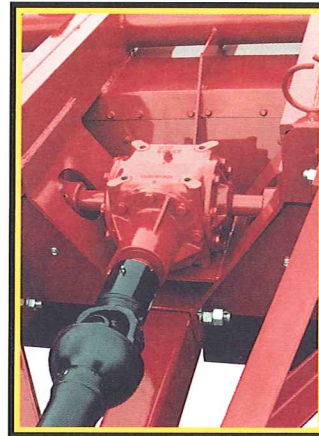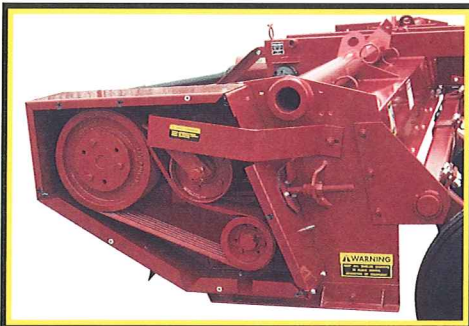

200 HP gearbox with overrunning clutch and constant velocity 1000 RPM PTO .

## M-C Cotton Shredder Specifications

Model	180CS	2206CS	2408CS
Hitch Type	Pull	Pull	Pull
Cutting Width	15 ft.	18 ft.	20 ft.
Rotor Speed	2000 RPM	2000 RPM	2000 RPM
Gearbox HP	200 HP	200 HP	200 HP
Constant Velocity U-Joint on Tractor End	1 <sup>3</sup> / <sub>8</sub> " or 1 <sup>3</sup> / <sub>4</sub> " Standard	1 <sup>3</sup> / <sub>8</sub> " or 1 <sup>3</sup> / <sub>4</sub> " Standard	1 <sup>3</sup> / <sub>8</sub> " or 1 <sup>3</sup> / <sub>4</sub> " Standard
Overrunning Clutch	Standard	Standard	Standard
PTO Speed	1000 RPM	1000 RPM	1000 RPM
Rims	4 - 8 x 15" Rims and Adjustable Axles Standard		
Tires	4 - 9.5L - 6 Ply Stubble Guard Tires Standard		
Rotor Diameter	85/8"	85/8"	85/8"
Rotor Bearings	2 <sup>3</sup> / <sub>16</sub> "	2 <sup>3</sup> / <sub>16</sub> "	2 <sup>3</sup> / <sub>16</sub> "
Drive System	Twin 3 Groove Power Band Belt Drive at Each End		
Knives	Side-Slice, Reversible Knives, Heat-Treated and Durafaced		
End Tow	Optional	Optional	Optional
Replaceable Hood Liner	Standard	Standard	Standard

One Year Machine Warranty on all CS Model Shredders.



Mathews Company • Crystal Lake, IL • USA • Phone: 1-800-323-7045 • Fax: 1-815-459-5889  
E-mail: [mcsales@mathewscountry.com](mailto:mcsales@mathewscountry.com) • [www.mathewscountry.com](http://www.mathewscountry.com)

*Iron Horse Quality Since 1954*